
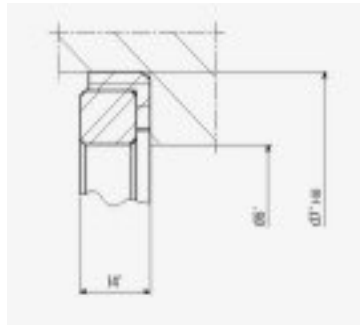


Tenute meccaniche serie FG/S

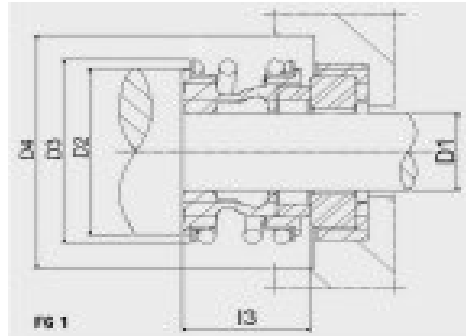

Con facce di scivolo in carburo di silicio e guarnizione in gomma NBR Cod. Materiale Q1Q1PGG.

Limite operativo P= 12 Bar V= 10 m/s T= -30 + 100 °C (200 °C con Viton).

Codice	D1	D2	D3	D4	I3	D6	D7	I4
008510	10	22.5	22.5	24	14.5	17	21	6.6
008512	12	22.5	22	26	15	19	23	6.6
008514	14	22.5	25.5	30	17	21	25	6.6
008515	15	26.5	28.5	30	17	21	25	6.6
008516	16	26.5	28.5	30	17	23	27	6.6
008518	18	26.5	28.5	33	19.5	27	33	7.5
008519	19	29	32	38	21.5	29	35	7.5
008520	20	33	36	38	21.5	29	35	7.5
008522	22	33	36	38	21.5	31	37	7.5
008524	24	38	41	44	22.5	33	39	7.5
008525	25	38	41	44	23	34	40	7.5
008528	28	44	49	50	26.5	37	43	7.5
008530	30	44	49	50	26.5	39	45	7.5
008532	32	46	53.5	55	27.5	42	48	7.5
008533	33	46	53.5	55	27.5	42	48	7.5

Codice	D1	D2	D3	D4	I3	D6	D7	I4
008535	35	50	57	59	28.5	44	50	7.5
008538	38	53	59	61	30	49	56	9
008540	40	55	62	64	30	51	58	9
008543	43	58	65.5	67	30	54	61	9
008545	45	60	68	70	30	56	63	9
008548	48	63	70.5	74	30.5	59	66	9
008550	50	65	74	77	30.5	62	70	9.5
008553	53	70	78.5	81	33	65	73	11
008555	55	72	81	83	35	67	75	11
008558	58	75	85.5	88	37	70	78	11
008560	60	79	88.5	91	38	72	80	11
008565	65	84	93.5	96	40	77	85	11
008568	68	88	96.5	100	40	81	90	11.3
008570	70	90	99.5	103	40	83	92	11.3

Documento in formato PDF dal sito www.emporiodelcuscinetto.it

Emporio del Cuscinetto
Viale del Lavoro, 32 - 35020 - Ponte San Nicolò - Padova - Italy
Tel. +39.049.89.61.481 r.a. - **Fax** +39.049.89.60.166

info@emporiodelcuscinetto.it